


The buffers meet the requirements of UIC 526-1, UIC 573, standard EN15551 and RID regulations referring to the protection of dangerous materials in transport.

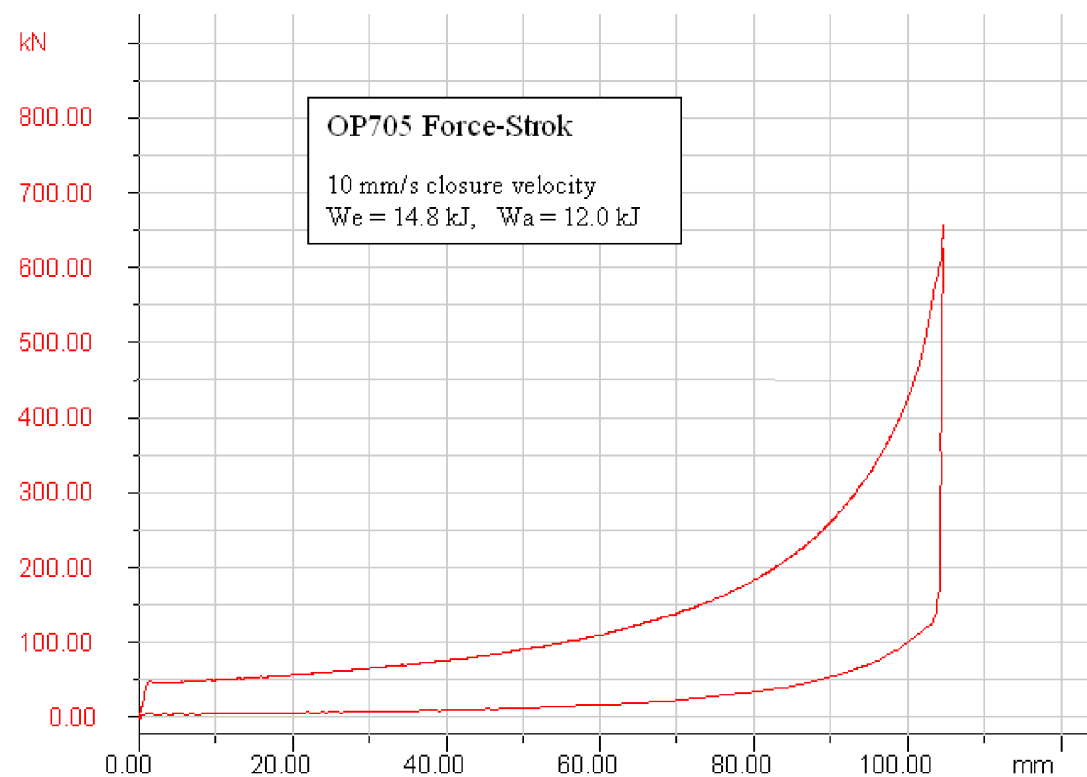

Technical parameters		static	dynamic
Stroke reversible/non-reversible	(mm)	105+170	105+170
Initial force reversible/non-reversible	(kN)	30/>1500	30/>1500
End force reversible/non-reversible	(kN)	600	1000/1800
Capacity	(kJ)	15	130+300

Coash buffer type IP400 CX

**AXXTONE**  
RAILWAY COMPONENTS

Offer drawing

No.: C125.C1050100