


The buffers meet the requirements of UIC 526-1, UIC 573, standard EN15551 and RID regulations referring to the protection of dangerous materials in transport.



Technical parameters		static	dynamic
Stroke reversible/irreversible	(mm)	105/170	105/170
Initial force reversible/irreversible	(kN)	20/>1500	20/>1500
End force reversible/irreversible	(kN)	700/1600	700/1600
Capacity	(kJ)	>30	>250

Crash buffer type IP250 AX

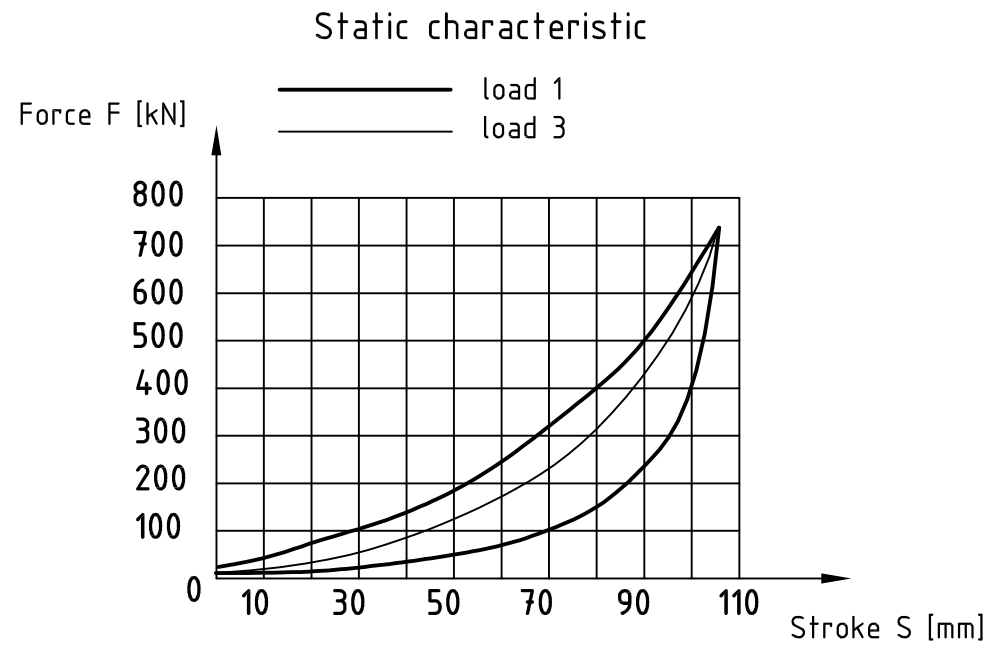

Offer drawing

No.: C125.A1050200