


The buffers meet the requirements of UIC 526–1, UIC 573, standard EN15551 and RID regulations referring to the protection of dangerous materials in transport.

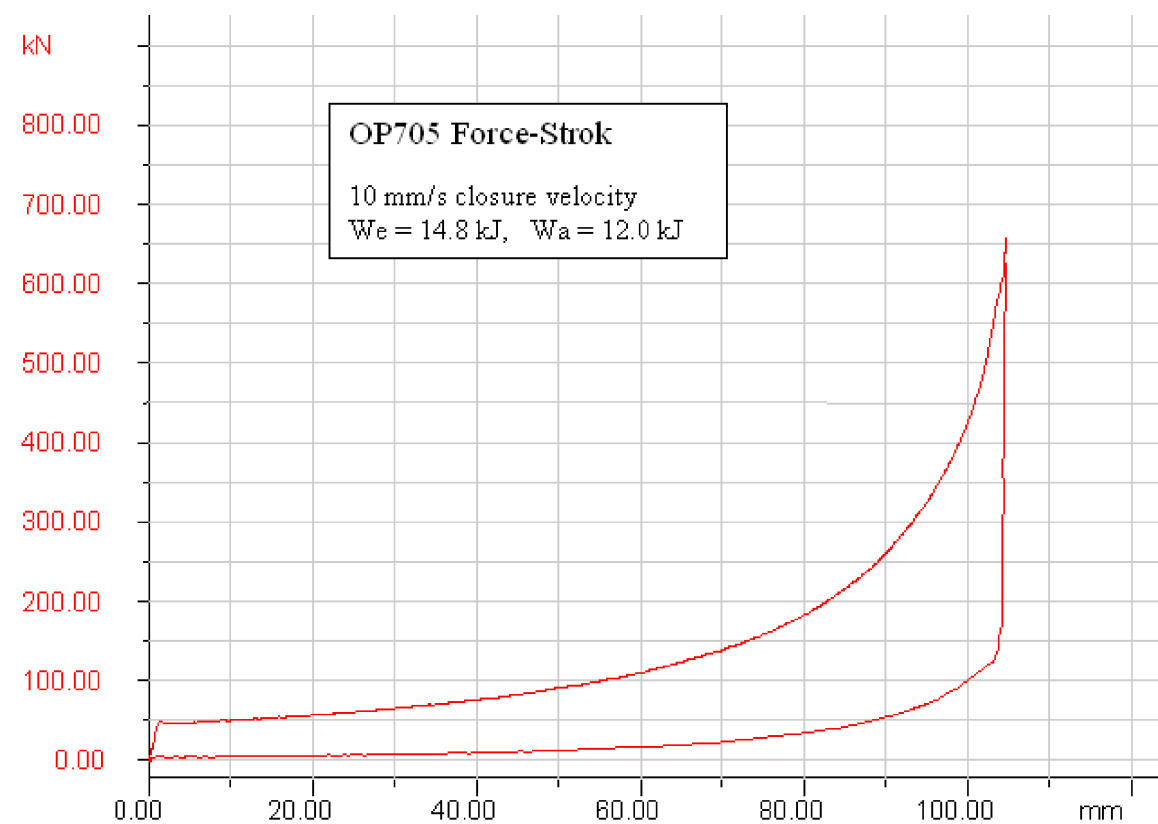

Technical parameters		static	dynamic
Stroke reversible/irreversible	(mm)	105+170	105+170
Initial force	(kN)	30	30
End force	(kN)	600	1600
Capacity (shock absorbed)	(kJ)	15	100
Capacity (crash module)	(kJ)		>250

Crash buffer type IP250 CX

AXTONE
RAILWAY COMPONENTS

Offer drawing

No.: C125.C1050200