


CHARACTERISTIC

— static
 - - - dynamic

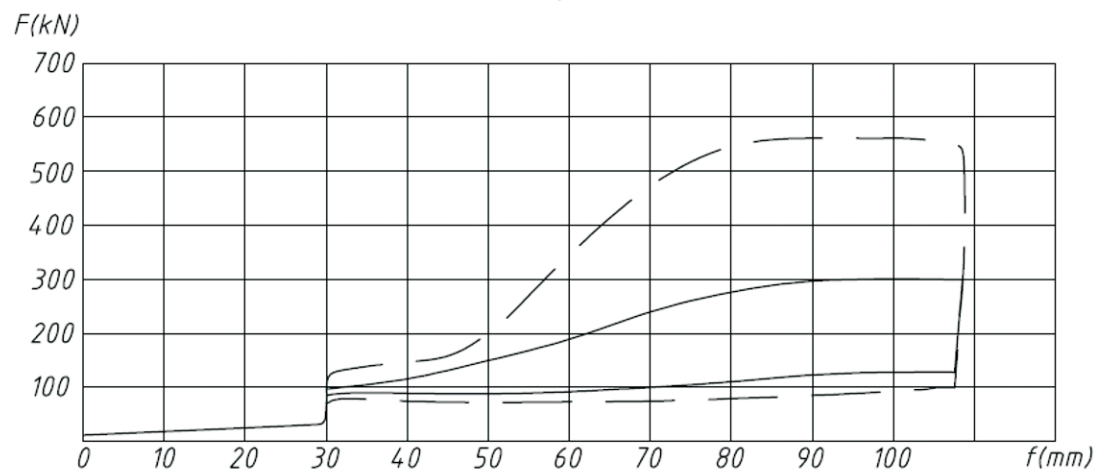

Technical parameters		static	dynamic
Stroke	(mm)	110	110
Initial force	(kN)	15	15
End force	(kN)	300	550
Capacity	(kJ)	16	30
Energy absorption coefficient	(%)	50	80
Mass	(kg)	220	

Buffer is equipped with hardened buffer head.

Buffer for passenger coaches type KX-ZP2

AXXTONE
 RAILWAY COMPONENTS

Offer drawing

No.: KX-ZP2 0103-4