


## AXTONE 1g BUFFER

Long stroke buffer acc. EN 15551 and UIC 526-3 leaflets with the stroke of 150 mm which additionally reduce acceleration on the good up to 1g for defined impact conditions. It is equipped with type Combigard shock absorber (combination of hydraulic with EuroPad solid elastomer spring). The buffer casing is manufactured in a unique process of hot extrusion. The buffer has good working parameters and operational reliability within the temperature range from -40°C to +50°C. The buffer is delivered with a buffer heads 450 or 550. The product has the TSI certificate. Application for the transport required high level of protection e.g. pocket wagons or wagons for transport of sensitive goods.



**Contact:**

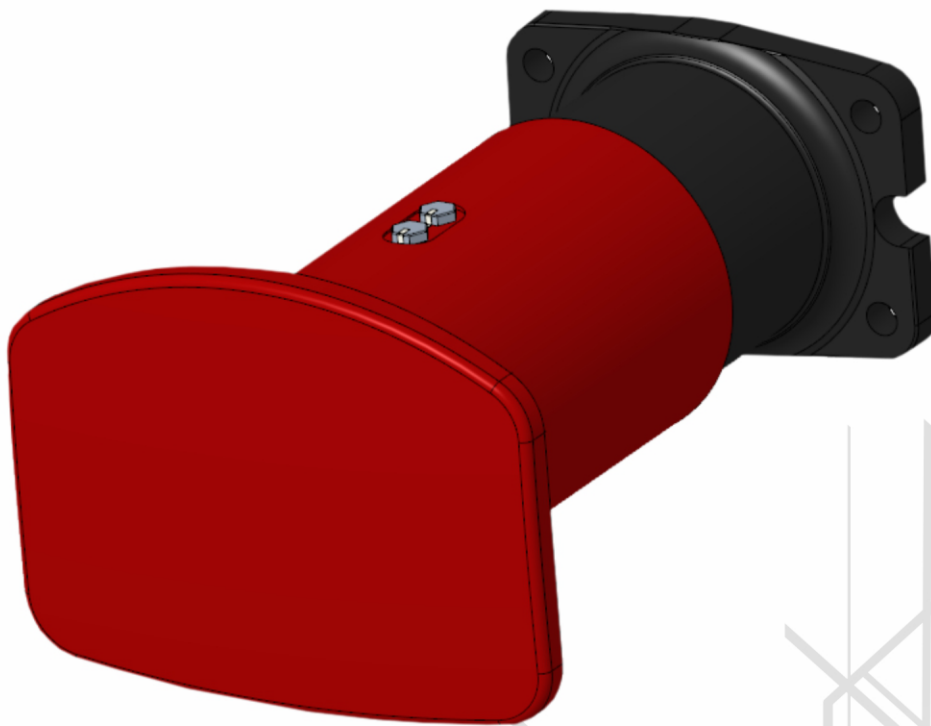

[www.axtoneglobal.com](http://www.axtoneglobal.com)

Axtone - an ITT company